

U40 4K NDI® Encoder

Turn Any Camera into NDI® Camera


 Φ : 90mm, H:30mm

Kiloview U40 4K NDI® encoder supports 4K P60 HDMI or USB input, convert to NDI high bandwidth, also it suports IP to NDI® | HX conversion.

With such functions like PoE+DC Out, PTZ, Tally, cold shoe on camera, the Kiloveiw U40 is the smallest and while most powerful NDI encoder which can turn any camera into an NDI camera. With only one network cable, video sources from HDMI cameras, web cameras, USB cameras and others can easily go into the NDI world and enjoy the advantages of IP-based transmission featuring ultra-high image quality and ultra-low latency.

Highlights:

- Real 4K P60 input supported
- ▼ HDMI or USB to NDI® high bandwidth
- ▼ RTSP/SRT/RTMP/HLS...to NDI®|HX (coming soon)
- DC Out to power your camera/monitor
- Dual Network ports for data transferring

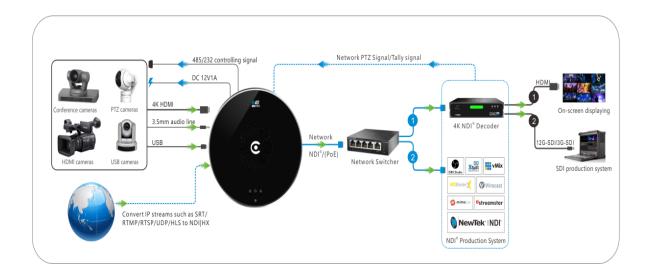

Features

Comprehensive NDI® performance, this gear gets it even extensive

- Convert 4Kp60 HDMI to NDI®;
- •Support 3.5mm analog audio embedded in NDI®;
- •USB video to NDI® (coming soon);
- •Convert IP streams such as SRT/RTMP/RTSP/UDP/HLS to NDI®|HX (coming soon).

Dual Gigabit Ethernet ports. Two networks and power supply enabled.

- •Dual Gigabit Ethernet ports can be applied to two different networks simultaneously, like SRT/RTMP input via WAN which can be output to NDI®|HX via LAN. Or you use one in WAN and another for LAN;
- PoE power and DC output 15W to power your monitor, recorder, or even your cameras.





Tally and PTZ Control. Just fits Production

- Bright Tally lights for PVW/PGM;
- PTZ camera through the serial port (232/485, etc.) or Network, Sony Visca/PELCO-D/PELCO-P and other control protocols supported.



Tiny, Exquisite, Quiet, and Cool

- •Exquisite look in round, with size 90mm*30mm;
- Easy installation of cold shoe on cameras;
- •Built-in mute cooling fan, quiet and cool.





Parameters

| Model | U40 |
|------------------------|--|
| Interface | HDMI 2.0 |
| Video resolution | 4K60, compatible with HD |
| Ethernet port | 2*1000M Ethernet port |
| USB interface | 1*USB2.0 |
| Analog audio interface | 1*3.5mm analog audio |
| | Support HDMI to Full NDI® |
| | Support 3.5mm analog audio embedded in NDI® |
| NDI® performance | Support USB to Full NDI® (Coming soon) |
| | Support other IP streams to NDI® HX |
| Tally light | Built-in |
| PTZ control | Support Sony Visca/Visca (Laia)/Visca (Kato)/PELCO-D/PELCO-P |
| РоЕ | Support |
| DC output | DC 12V |
| Size | Ф: 90mm, H:30mm; Ф3.54", H:1.18" |
| Weight | 310g (10.9oz) |
| Power/power | DC 12V1A |
| consumption | |

NDI® is a registered trademark of NewTek Inc.