

Iso Blanket

Insulation



Description

ISO Blanket and ISO Blanket Pro are limp-mass solutions designed for the treatment of airborne noise. They differ in their STC (Sound Transmission Coefficient) in that ISO Blanket Pro has a bigger coefficient/performance due to its agglomerated fabrics.

The blankets perform as sound barriers when applied to ceilings, walls and floors. Their flexibility, thin design and high resistance make them easy-to-use materials. They are most effective when used in construction projects that involve several layers of different material. Density - 1900-2000 kg/m³ It ensures a high level of isolation by diminishing the sound emitted from joints between the floor and the rest of the construction.

Available Products

- 1) Iso Blanket
- 2) Iso Blanket Pro

Available Finishes

- N/A

Dimensions

- 1) 5000 x 1000 x 4mm / 393.7" x 3.9" x 0.01"
- 2) 5000 x 1000 x 10mm / 393.7" x 3.9" x 0.4"

Packing Information

Units per box: 1

- Box: 1) Ø200 x 100mm / Ø7.8" x 3.9"
- 2) Ø300 x 100mm / Ø11.8" x 3.9"

Box Gross Weight: 1) 39.8kg / 87.7lbs
2) 23kg / 50.7lbs

Technical Information

Material: Modified bitumen with elastomer polymers

Fire Rating:


- Europe: Euroclass B-s2 d0

Installation: Mechanical Fixation

More information:

www.vicoustic.com/products/isoblanket

Performance

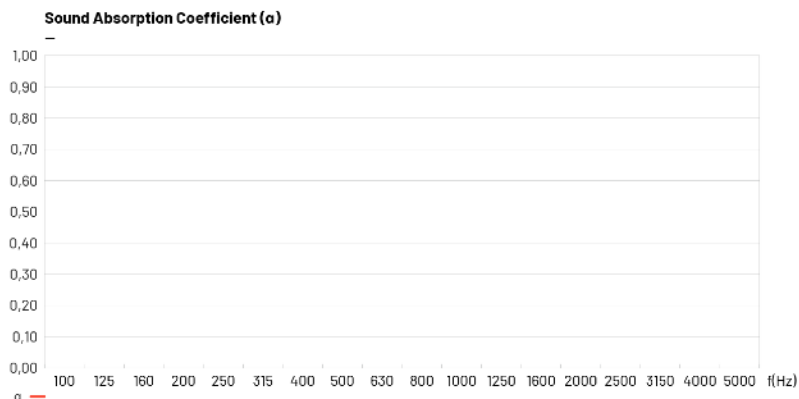

VI-Aug.19